




# LICHTPLAN LINDENZAAL

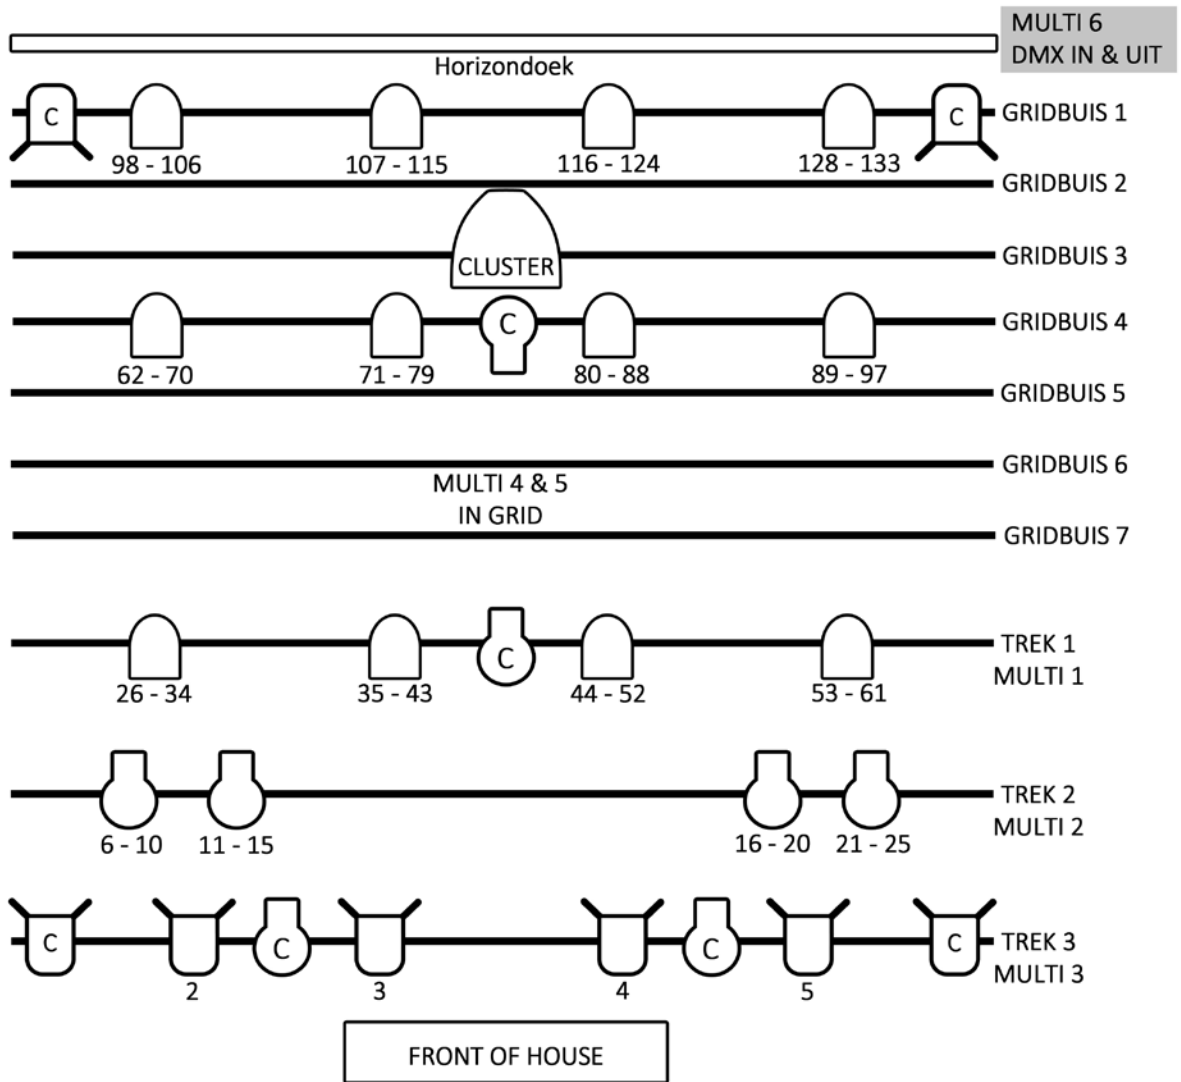

CONVENTIONELE 1kW PC	PONY LED FRESNEL	ETC COLOURSOURCE SPOT RGB	SELECON 1kW PROFIEL	FARGO LED RGBW ZOOM PAR MODE 3
-------------------------	---------------------	---------------------------------	------------------------	--------------------------------------

Zaallicht = channel 1  
Tragleuning = 200 - 203 RGBW

12 Patchbare dimmerkringen (Ch. 140 t/m 151)  
Maximaal 7 per harting. 8 is mogelijk, vaste  
spanning tbv. LED verlichting vervalt.

LAATSTE UPDATE:  
25-05-2018



## KANALENLIJST LINDENZAAL

FARGO STAGEPAR 19 PRO ZOOM								
RED	GREEN	BLUE	WHITE	DIMMER	DIMMER FINE	STROBE	COLOR	ZOOM
26	27	28	29	30	31	32	33	34
35	36	37	38	39	40	41	42	43
44	45	46	47	48	49	50	51	52
53	54	55	56	57	58	59	60	61
62	63	64	65	66	67	68	69	70
71	72	73	74	75	76	77	78	79
80	81	82	83	84	85	86	87	88
89	90	91	92	93	94	95	96	97
98	99	100	101	102	103	104	105	106
107	108	109	110	111	112	113	114	115
116	117	118	119	120	121	122	123	124
125	126	127	128	129	130	131	132	133

ETC COLOURSOURCE SPOT				
DIMMER	RED	GREEN	BLUE	STROBE
6	7	8	9	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

PONY LED FRESNEL
DIMMER
2
3
4
5

ZAALLICHT
DIMMER
1

TRAPLEUNING			
RED/DIM	GREEN/DIM	BLUE/DIM	WHITE/DIM
200	201	202	203

12 PATCHBARE DIMMERKRINGEN
DIMMER
140 t/m 151

LAATSTE UPDATE:  
25-05-2018